

INDUSTRIAL

- High Bay & Wellglass fixture
- Radial Heat sinks
- Energy Efficient
- Surge protection : 9KV
- Colour : 3000K / 6500K
- Rating : 50Watt - 225Watt
- Low Maintenance & Robust Design



DECORATIVE

- Unique & innovative design
- Low maintenance
- Mercury free
- High efficiency driver with surge protection
- RGB integration
- Color temperature : 3000K / 6500K
- Rated wattage : 5W upto 90W
- Special design (on request)



OUTDOOR



COMMERCIAL



INDUSTRY

REFER DETAILED BROCHURE

For Trade Enquiries Contact :

Powerplus Technology India Pvt. Ltd.



Registered Office :

P-51, Kalindi Housing Estate, Ground Floor, Kolkata - 700 089

Corporate Office :

Sudha Apartment, Ground Floor
P-17 Rastraguru Avenue, Kolkata - 700 028

Phone : 9331042395

E-mail : pp_tech_cal@yahoo.com

Website : www.pptipl.com

lighting the future ▶▶▶

CE



2 Years Warranty
*Extended warranty on condition




Powerplus

STREET LIGHT


REGULAR

- Input Voltage : 90 - 300V AC
- Rated Wattage : 12W upto 150W
- THD : Less than 10%
- Power factor : More than 0.9
- EMI Noise : No
- Surge Protection : 4.7KV
- Light Output : 120Lm / Watt.
- Color Temperature : 3000K / 6500K
- Built in Lens

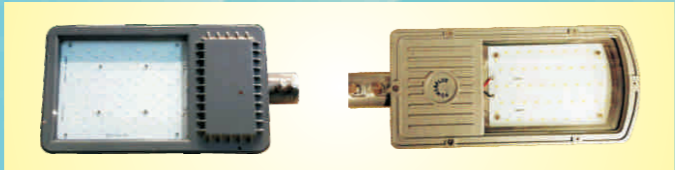

PREMIUM

- Input Voltage : 90 - 300V AC
- Rated Wattage : 150W upto 200W
- Special design with 5050 chips
- High Efficacy
- THD : Less than 10%
- Power factor : More than 0.9
- EMI Noise : No
- Surge Protection : 4.7 / 9KV
- Light Output : 140Lm / Watt.
- Color Temperature : 3000K / 6500K
- Built in high efficiency Lens

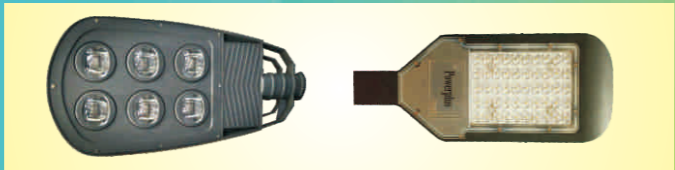

FLOOD LIGHT

REGULAR

- Input Voltage : 90 - 300V AC
- Rated Wattage : 12W upto 150W
- THD : Less than 10%
- Power factor : More than 0.9
- EMI Noise : No
- Surge Protection : 4.7KV
- Light Output : 120Lm / Watt.
- Color Temperature : 3000K / 6500K
- Built in Lens



PREMIUM

- Input Voltage : 90 - 300V AC
- Rated Wattage : 150W upto 400W
- Special design with 5050 chips
- High Efficacy
- THD : Less than 10%
- Power factor : More than 0.9
- EMI Noise : No
- Surge Protection : 4.7 / 9KV
- Light Output : 140Lm / Watt.
- Color Temperature : 3000K / 6500K
- Built in high efficiency Lens



GARDEN LIGHT & PTL

- Unique & innovative design
- Low maintenance
- Mercury free
- High efficiency driver with surge protection
- RGB integration
- Color temperature : 3000K / 6500K
- Rated wattage : 5W upto 90W
- Special design (on request)

